



TECHNICAL SF VOLTS AMPS	TECHNICAL SPECIFICATIONS 12.5A 1500W
	1500W
HIGH	1500W watts
TOW	750W watts
NO HEATER	39 WATTS MAX
YTITNAUQ	136 PCS LED
LAMPS WATTS	M90.0%MS1.0%MS.0
TOTAL WATTS	38 W
ROTOR MOTOR	1 at 2.9 watts
HEIGHT.WIDTH.DEPTH	49.2 X 152.4 X 13.2 cm
GLASS VIEWING OPENING	28.2 X142.4 cm
FRAMING SIZE	47 X 146.9 X 17.3 cm
SHIPPING SIZE	
SHIPPING WEIGHT	*** Kgs
TINU	_
GLASS FRONT Included	Included
PLUG LOCATION	Left Side



APPROX.HEATING AREA 400 SQ FT

CORO LENGTH

70.9 < L < 95.5

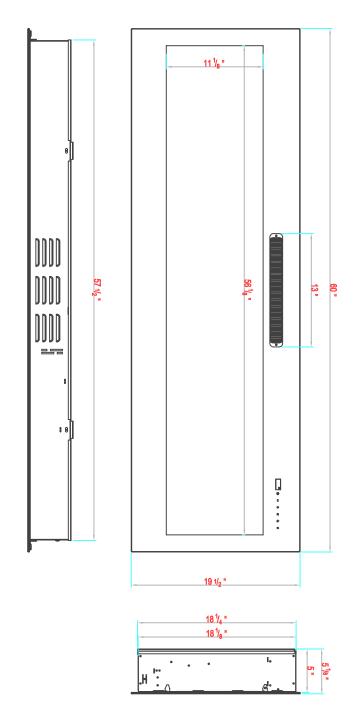

TECHNICAL SPECIFICATIONS																				
	AFFROX. DEATING AREA	CORO LENGTH	PLUG LOCATION	GLASS FRONT	TINU	SHIPPING WEIGHT	SHIPPING SIZE	FRAMING SIZE	GLASS VIEWING OPENING	HEIGHT.WIDTH.DEPTH	ROTOR MOTOR		QUANTITY	NO HEATER			WATTS			TECHNICAL SF
	400 300 71		Left Side	Included	7	*** Kgs		18 1/2 " X57 7/8 " X6 7/8 "	1/8 "	1/2 " X60 " X5 1/8		38 W	136 PCS LED	39 WATTS MAX	750W watts	1500W watts	1500W	12.5A	120V	PECIFICATIONS

